

UK Power (Mains) Plug, Cord Connector (Rewireable), 3 pole, Angled



### Description

attachment plug, Clip for Pins

### Weblinks


[pdf](#), [html](#), [General Product Information](#), [Approvals](#), [RoHS](#), [CHINA-RoHS](#), [Mating Connectors](#), [e-Shop](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#), [Accessories](#)

### Technical Data

Ratings IEC	13 A / 250 VAC; 50 Hz
Ratings UL/CSA	13 A / 250 VAC; 60 Hz
Allowable Operation Temp.	-25 °C to 70 °C
Degree of Protection	from front side IP 40 acc. to IEC 60529
Protection Class	Suitable for appliances with protection class 1 acc. to IEC 61140
Material: Housing	white

### Dimensions

50 mm

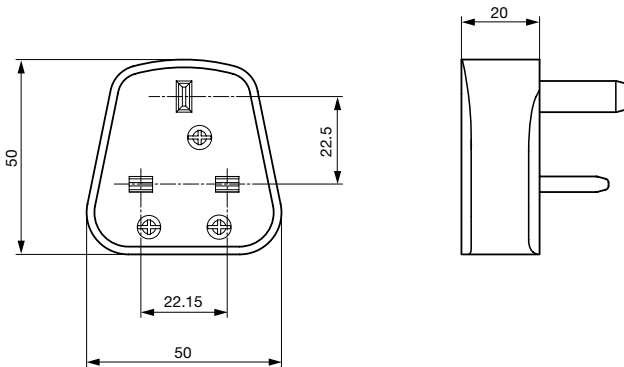

## Config. Code

1363 - H - A B C 0 - D - E J

The characters are placeholders for the correspondingly keys of selections from the key tables.

1363 - **H** - A B C 0 - D - E J = Type

Type	Configuration key
resale product	A

1363 - H - **A** B C 0 - D - E J = Terminals

Terminal L	Configuration key
screw terminal	A

1363 - H - A **B** C 0 - D - E J = Terminals

Terminal N	Configuration key
screw terminal	A

Symbols similar as in table A

1363 - H - A B **C** 0 - D - E J = Terminals

Terminal Ground	Configuration key
screw terminal	A

Symbols similar as in table A

1363 - H - A B C 0 - **D** - E J = Color

Color	Configuration key
White	D

1363 - H - A B C 0 - D - **E** J = Style

Style	Configuration key
for cord assembly	8

1363 - H - A B C 0 - D - E **J** = Condition

Condition	Configuration key
assembled	1

**Packaging unit** 10 Pcs